



P. O. Drawer 349, Monticello, GA. 31064
Phone: 800-542-7659 Fax: 706-468-2881
E-Mail: polytech@polyskid.com
www.polyskid.com


Grain Grabber Mounting Instructions

fits 14" and 16" Auger Tube

PLEASE READ THE ENTIRE INSTRUCTION SHEET BEFORE STARTING INSTALLATION

PLEASE REFER TO THE OPERATORS MANUAL FOR YOUR
SPECIFIC COMBINE FOR PERTINENT SAFETY PRECAUTIONS

1. To begin, roll auger in direction of travel until outer end flight is at high noon.
2. Place first Grain Grabber on auger tube midpoint between start and second auger flight. The GG is situated perpendicular to the direction of the auger, and is designed with a curve which fits snug against the outer tube.
3. Mark hole placement. Drill two holes with the drill bit, *included in your kit*, to ensure that the self tapping bolts hold tight. Attach GG with self-tapping bolts, *included in your kit*. Each GG will then be attached at the high noon position for a safer installation process.
4. To install the second GG, turn the auger in the opposite direction of travel, (towards the combine) until the first GG is at "9 o'clock" on the right side or "3 o'clock" on the left side. Repeat step 3, yet the placement will be midpoint of the second and third flight.
5. To install the third GG, turn the auger in the opposite direction of travel again until the second GG is at "9 o'clock" on the right side or "3 o'clock" on the left side. Repeat step 3, yet the placement will be the midpoint of the third and fourth flight.
6. To install the fourth GG (for 25' and 30' heads only) turn the auger in the opposite direction of travel again until the third GG is at "9 o'clock" on the right side or "3 o'clock" on the left side. Repeat step 3, yet the placement will be the midpoint of the fourth and fifth flight.
7. To install the fifth GG (for 30' heads only) turn the auger in the opposite direction of travel again until the fourth GG is at "9 o'clock" on the right side or "3 o'clock" on the left side. Repeat step 3, yet the placement will be the midpoint of the fifth and sixth flight.

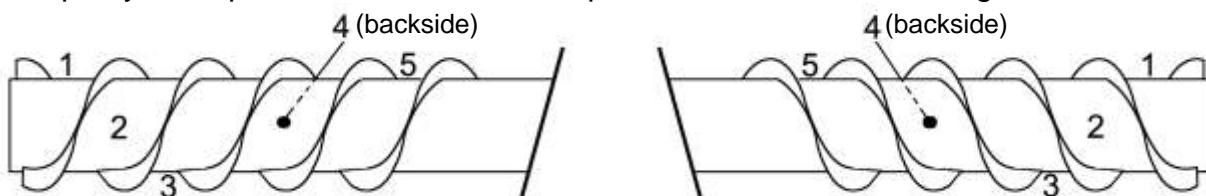

In short, each Grain Grabber will be installed after one quarter turn of the auger in the opposite direction of travel.

NOTE: We recommend you mark and confirm the location of all Grain Grabbers before installation.